


500-fps, 1.3-Megapixel CMOS Image Sensor

Featuring Micron's TrueSNAP™ Electronic Shutter

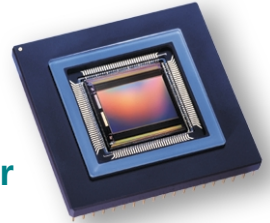

Features

- 1,280H x 1,024V image resolution
- TrueSNAP™ freeze-frame electronic shutter
- 500 frames per second (fps)
- Monochrome or color digital output
- <500mW maximum power dissipation @ 600 fps
- On-chip, 10-bit analog-to-digital converters (ADCs)
- Simple digital interface

Description

Micron's MI-MV13 is the world record holder for the fastest CMOS image sensor. The sensor features Micron's revolutionary TrueSNAP freeze-frame electronic shutter, which enables simultaneous exposure of the entire pixel array to stop even the fastest motion with crystal clear images. It delivers 10-bit color or monochrome digital images with a 1.3-megapixel resolution at 500 fps—or 655 million pixels per second—for machine vision and high-speed imaging applications. The sensor can run at higher frame rates by reducing the window size (e.g., 4,800 fps for a 1,280 x 128 pixel window). Digital responsiveness of 1,600 bits per lux-second and Micron's exclusive TrueBit® noise cancellation and Micron TrueColor™ image fidelity ensure high image quality.

The simple digital interface provides flexibility to control exposure time, frame rate, windowing functionality, and other parameters. Compared to charged-coupled device (CCD) based cameras, the MI-MV13 is much simpler to design a camera around, and it enables a faster time-to-market with a smaller, lower-power and higher-performance camera.

Applications

The MI-MV13 CMOS image sensor captures complex high-speed events for traditional machine vision applications, as well as various high-speed imaging applications. Its electronic shutter is capable of freezing and capturing near-instantaneous events with a 1.3-megapixel resolution while outputting 500 fps. The sensor can capture an event with a series of images taken at a high repetitive rate, enabling them to be viewed at lower speeds.


Applications include machine vision (production line monitoring and control for industries ranging from semiconductor fabrication to food sorting); automotive testing; microscopy; traffic control; 3D imaging; animation; motion analysis; film special effects; forestry; industrial and military research; and security systems. The MI-MV13's capabilities enable camera performance far beyond current CCD-based systems, creating an unprecedented number of possibilities for future applications.



Specifications

■ Array Format:	1,280H x 1,024V (1,310,720 pixels)	■ Operating Temperature:	-5°C to +60°C
■ Aspect Ratio:	5:4	■ Output:	10-bit digital video through 10 parallel ports
■ Pixel Size and Type:	12.0µm x 12.0µm TrueSNAP	■ Color:	Monochrome or color RGB
■ Sensor Imaging Area:	H: 15.36mm V: 12.29mm Diagonal: 19.67mm	■ Shutter:	TrueSNAP freeze-frame electronic shutter
■ Frame Rate:	0–500 fps @ (1,280 x 1,024) >10,000 fps with partial scan [e.g., 0–4,800 fps @ (1,280 x 128)]	■ Shutter Efficiency:	>99.9%
■ Output Data Rate:	660 MB/s (master clock, 66 MHz; ~500 fps)	■ Shutter Exposure Time:	<100ns to >33ms
■ Power Consumption:	<500mW at 500 fps	■ ADC:	On-chip, 10-bit column parallel
■ Digital Responsivity:	1,600 bits/lux-sec at 550nm	■ Package:	280-pin ceramic PGA
■ Internal Intra-Scene Dynamic Range:	59dB	■ Controls:	On-Chip: <ul style="list-style-type: none">■ ADC controls■ Output multiplexing■ ADC calibration Off-Chip: <ul style="list-style-type: none">■ Window size and location■ Frame rate and data rate■ Shutter exposure time (integration time)■ ADC reference
■ Supply Voltage:	+3.3V		

Block Diagram

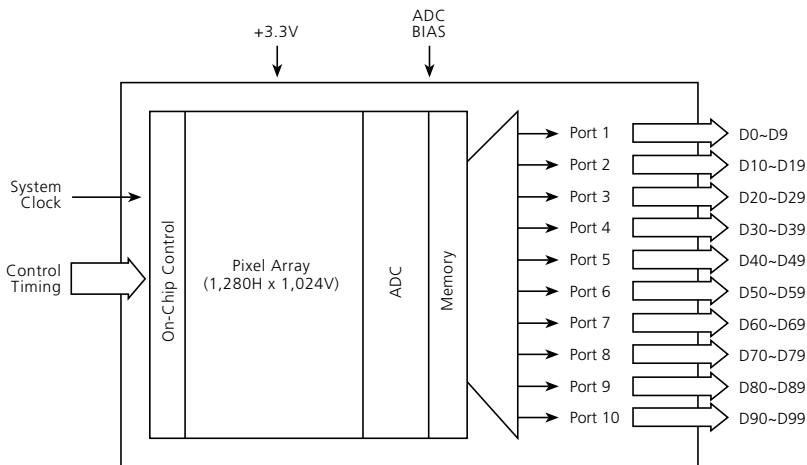

To learn more about Micron's imaging products, visit our Web site at www.micron.com/imaging, or call us at 208.368.3900.

www.micron.com

Micron and TrueBit are registered trademarks and the Micron logo, "The future of memory," Micron TrueColor, and TrueSNAP are trademarks of Micron Technology, Inc. Products and specifications are subject to change without notice. ©2002 Micron Technology, Inc. 05.06.02


The future of memory